


Tre Modular - Replicant VCF

User Manual

Thank you for choosing Tre Modular - Replicant VCF Eurorack module!

This guide will walk you through the features, and usage of this module.

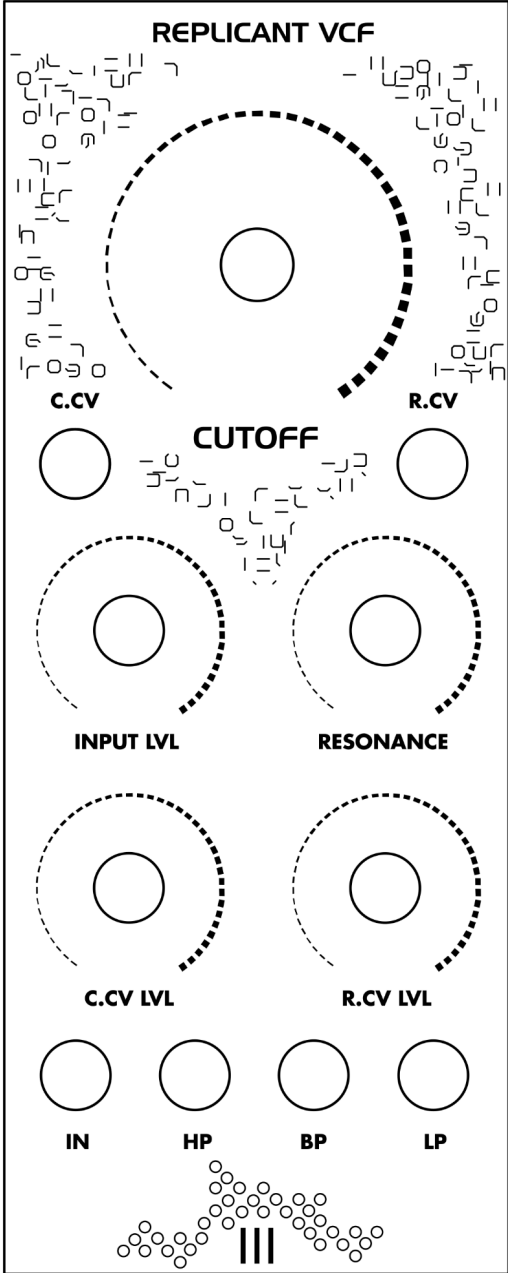

Features:

- Multimode filter with low-pass, band-pass, and high-pass outputs.
- Fully analog signal path.
- Voltage control over Cutoff Frequency and Resonance.
- Compact 10 HP size.

Filter:

Tre Modular - Replicant VCF is a multimode filter based on classic Yamaha - CS80 synthesizers filter. This module is a -12 dB per octave second-order state variable filter. It offers low-pass, band-pass, and high-pass outputs.

Replicant VCF is designed to replicate the sound characteristics of the Yamaha CS80 filter. The CS80 is known for its warm and mellow sound, and the Replicant VCF aims to reproduce those distinctive characteristics in Eurorack format. If you want that classic CS80 sound in your Eurorack system, this is it.

Specifications:

Module width: 10 HP

Module depth: 25mm

CV: -5v to +5v

Power Consumption: 33mA at +12V / 30mA at -12V

Reversed polarity protection

Controls:

Cutoff: Adjusts the cutoff frequency of the filter.

Resonance: Controls the resonance of the filter, introducing emphasis and character to the selected frequency. Higher resonance settings result in a more pronounced peak at the cutoff frequency.

Input LVL (Input Level): Controls the input level, determining the strength of the incoming signal entering the Replicant VCF.

C.CV LVL (Cutoff CV Level): Controls the level of influence that external voltage control has on the cutoff frequency.

R.CV LVL (Resonance CV Level): Controls the level of influence that external voltage control has on the resonance parameter.

Voltage-Controlled Features:

C.CV: Voltage control over the filters cutoff.

R.CV: Voltage control over the resonance of the filter.

Inputs:

IN: Signal input.

Outputs:

HP: High-pass output.

BP: Band-pass output.

LP: Low-pass output.

Installation:

Power off your Eurorack system.

Insert the module into an available slot.

Connect the power cable, ensuring correct polarity.

Power on your Eurorack system.

Enjoy!

Additional Information:

For any additional questions or support, please contact Tre Modular at support@tremodular.com.

Happy patching!

